FlashLink® BLE MAX

40986 Quick Start Guide


Step 1:

To open the device, grip the yellow housing and turn the cover counter-clockwise (left) until it separates from the base.



Step 2:

Press and hold the button until the blue LED flashes, this will indicate the device is now activated.

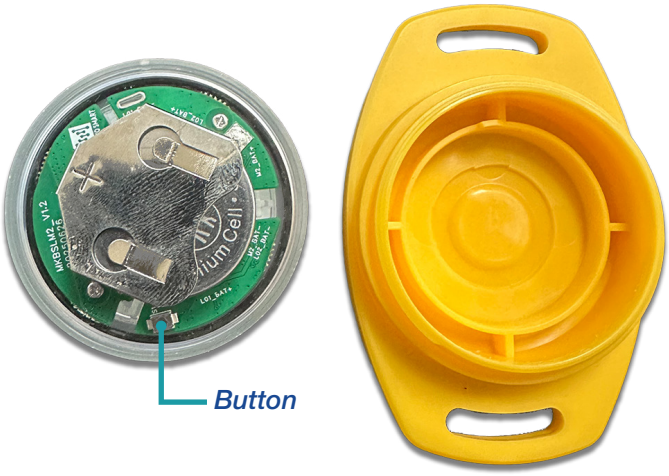

Step 3:

The blue LED can be seen from the front face of the top half.



* Pressing the button again will not deactivate the device. Check and verify the device is active before reassembling.

Step 4:

Reassemble the device by placing the top half into the yellow housing. Turn the cover clockwise (right) until it stops and the faceplate is fully vertical. The device is not securely closed in any other position.



Correct *Not correct*

DeltaTrak®

P.O. Box 398 Pleasanton, CA 94566 USA | p (925) 249-2250 | (800) 962-6776 | f (925) 249-2251 | www.deltatrak.com